

 1500 Nits Super High Brightness



**4K**

Native 4K Resolution

**HDR**

High Dynamic Range

**P3**

P3 Gamut 99% Coverage

**SDI**

12G-SDI

**SFP**

SDI SFP +

### 32" 4K HDR MINI-LED MONITOR

KXM-3210M, 32 inch 4K Mini-LED HDR reference monitor, 3840x2160 resolution with 2x12G-SDI & 2x3G-SDI inputs/outputs. Sub-pixel independent light control, 1,000,000:1 ultra-high contrast ratio Its color gamut can reach more than 99% of DCI-P3. Slim body design, fully silent fanless, 0.1ms instantaneous response time is the priority choice for professional and high-quality 8K/4K video live broadcast, shooting, post-production and other applications.

  
BT.2020

  
Waveform


  
VectorScope

  
Focus Assist

  
Audio Meter

  
False Color

  
Zebra

  
TSL UMD

  
GPI

#### Panel

|                |                        |
|----------------|------------------------|
| Model No.      | KXM-3210M              |
| Display Type   | Mini-LED, 99% P3 Gaumt |
| Size           | 31.5"                  |
| Resolution     | 3840x 2160             |
| Aspect Ratio   | 16 : 9                 |
| Viewing Angle  | 178°(H) / 178°(V)      |
| Color Depth    | 1.07B                  |
| Brightness     | 1500 cd/m <sup>2</sup> |
| Contrast Ratio | 1,000,000:1            |

#### Input

|              |   |
|--------------|---|
| 1 x SDI SFP+ | SDI SFP+ input cage   |
| 1 x HDMI 2.0 | HDMI 2.0 signal input   |
| 2 x BNC      | 12G-SDI signal inputs<br><i>(Auto-detected and compatible to 6G/3G/HD/SD-SDI)</i> |
| 2 x BNC      | 3G-SDI signal inputs<br><i>(3G/HD/SD-SDI auto detected)</i>                       |

#### Output

|              |  |
|--------------|--|
| 2 x BNC      | 12G-SDI signal outputs<br><i>(Auto-detected and compatible to 6G/3G/HD/SD-SDI)</i> |
| 2 x BNC      | 3G-SDI signal outputs<br><i>(3G/HD/SD-SDI auto detected)</i>                       |
| 1 x HDMI 2.0 | HDMI 2.0 signal output   |

#### Audio In & Out


|                      |   |
|----------------------|---|
| SDI/HDMI Audio In    | 16 Channels SDI<br>2 Channels HDMI embedded audio |
| Audio Meter Display  | Vertical<br>Horizontal audio level meter display  |
| Audio Headset Output | 3.5mm headset jack                                |
| Built-in Speaker     | 2.5Wx2  |

#### General

|                   |                           |
|-------------------|---------------------------|
| Input Voltage     | AC 100-240V 50/60Hz       |
| Power Consumption | 160 W                     |
| VESA Installation | VESA MIS-D (200x200mm)    |
| Accessory         | Power Cord /Desktop stand |

Specifications may be changed without prior notice.

### Main Body

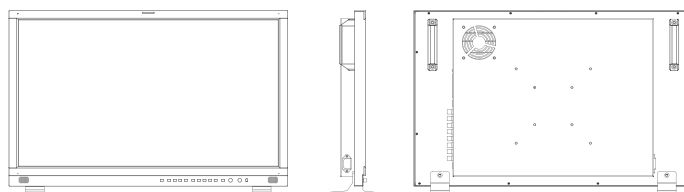


### Specifications

- 3840x2160 4K resolution, 10Bit Mini-LED panel
- Wider Gamut Coverage: 99% DCI-P3
- 12 Bit Video Processing, Anti-Burn-In Technology
- 2 x 12G-SDI inputs and outputs (6G/3G/HD/SD-SDI auto detect)
- 2 x 3G/HD/SD-SDI inputs and outputs
- 4K 12G-SDI single link signal, up to 4096 x 2160 60p
- 4K signal: 2 Sample Interleave (2SI), Square Division (SQD)
- 1 x HDMI 2.0 input, 1 x SDI SFP+ module optical input cage
- 4K Mode, Quad-Split Mode, FHD single picture mode
- 4 x SDI/HDMI Quad-View: mixed inputs & frequency rates
- Free Quad-View (boarder control/window adjustment)
- Payload ID display
- Color Space & EOTF Curves Auto Setting, matching(Rec.709/Rec.2020)
- Color Space (Rec.709/EBU/DCI-P3 D65/DCI-P3/Rec.2020/Bypass)
- HDR: PQ (ST2084), HLG (1.03/1.11/1.16/1.20/1.27/1.33)
- Sony Camera Log Curves: Slog, Slog2, Slog3
- Canon Camera Log Curves: Clog, Clog2, Clog3
- ARRI Camera Log Curves: LogC/DJI Camera Log Curves: Dlog
- Panasonic Camera Log Curves: Vlog, Vlog (softroll)
- DJI Camera Log Curves: D-log
- Gamma (2.0, 2.2, 2.4, 2.6), HDR Area Display
- 4K HDR Waveform, Vector Scope, Marker/Box Control Function
- 3D LUT Color calibration with ColourSpace & CalMAN
- 3rd-party 3D LUT files import(USER1~6)
- S1 - S8 Eight Selectable Scene Settings
- Picture Flip, Focus Assist, False Color, Zebra
- SDR and HDR comparison, Darkness Check
- Full Scan, Over Scan, Blue/Mono Only
- 16ch Embedded Audio Level Meters
- Dynamic and Static UMD Display (TSL3.1/4.0/5.0)
- 608/708 CC Closed Caption
- Key Lock, Video Freeze
- Firmware upgrade/LUT file import via USB/Ethernet
- GPI (selectable/markable windows)
- Aluminum Alloy Casing, Built-in Speaker

**4K Signal, Native 4K Resolution**

Native 4K resolution, 4K 12G-SDI single link supports utmost 4096 x 2160 60p format, 2 x 12G-SDI signal inputs and outputs (auto detected 6G/3G/HD/SD-SDI), 1xHDMI2.0 input, 1xSDI SFP+ module input cage.

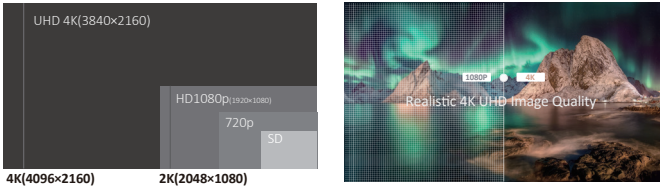


**Motion-Adaptive Interlace to Progressive**

Realizing quick response of the fast moving image, avoids duzy, saw tooth and other problems, ensures clearer and smoother image, well-satisfied high-end demanding workflows such as live sports, camera shaking and rolling subtitles etc.



**EOTF Curve Conversions**

Konvision KUM 4K, 8K and KVM-6X series supports a variety of EOTF curve conversion applicable to the broadcast industry and digital film standard. A preset of lots of camera logs and gamma curve selections, so as to realize the perfect combination with the camera system.

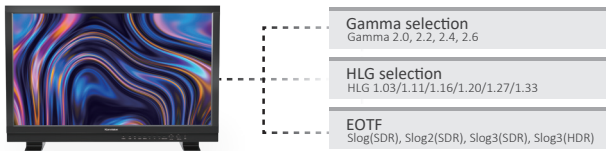


**HDR Waveform, HDR Area Display**

HDR reference white is 203nits. The part that exceeds the reference white level (203nits) considered as the HDR highlight part, and the HDR highlight ratio should not exceed 20% of the entire image. HDR waveform, HDR area display can make the HDR info more intuitively displayed, which is more convenient for users.



**2SI and SQD 4K signal**

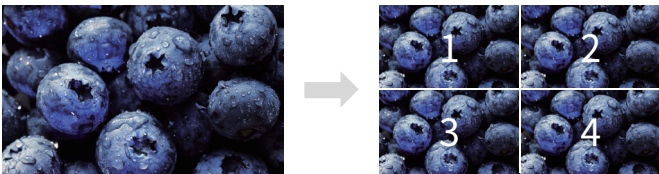


4K 2 Sample Interleave (2SI) : Pixel based segmentation



4K Square Division (SQD) : Quadrant based segmentation

**High Dynamic Range(HDR)**

Konvision KUM 4K, 8K and KVM-6X series support HDR display. Adjustable HDR modes include PQ(ST2084), HLG with Rec 2020 color gamut. It reproduces a greater dynamic range of luminosity and provides extremely high level picture quality.

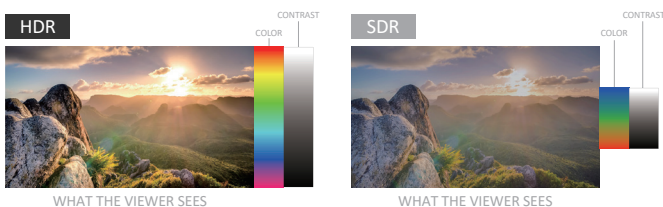


WHAT THE VIEWER SEES

WHAT THE VIEWER SEES

**3D LUT Color Calibration**

Compatible with ColourSpace and Calman color calibration software, Konvision monitors apply K10-A probe(professional level) to achieve a precise color. Monitor's also workable with universal colorimeters including CA210, CA310, CS200, CR100, CR250, X-Rite i1 Display.

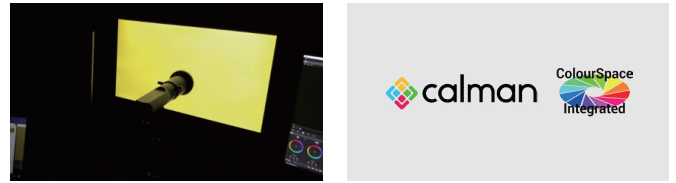

**3D LUT files import**

With the LUT loading function, users can load 2 different 3D LUT files with different color types according to their own needs, making DIT, post production and grading work simpler and more intuitive, optimizing the work flow and improving work efficiency.



**Quad View Mode**

Quad View Mode support mixed inputs & frequency rates. Each window can change to single picture mode with shortcut button or GPI. Each windows can select different color space and HDR waveform.




**4K HDR Waveform (Alarm), Vectors**

4K HDR Waveform. SDI and HDMI support Waveform, Vectorscope, Histogram. When luminance reaches or exceeds the preset value, the over exposure areas will be red marked (Waveform Alarm).



**Darkness Check**

Increasing the brightness and contrast ratio in the dark areas, Darkness Check function can show more shadow details of the input signal. Darkness Check can be used for double checking the shadow detail of the dark areas to avoid any missing information.

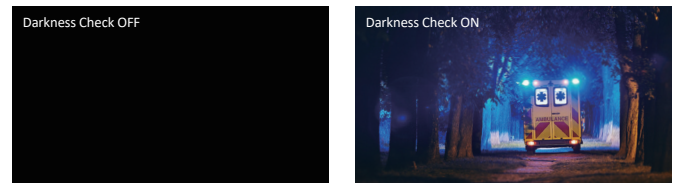

**4K BOX Control**

The BOX Control function can flexibly set the height and width of the marker frame on the monitor, and can be adjusted up, down, left and right. Users can flexibly adjust according to the frame ratio, which brings great convenience to program production.



**Zebra**

Display the overexposed areas(too bright) of the image with zebra stripes, aids the camera operator to control the luminance, in order to avoid overexposure. This feature is very effective for proper exposure.

